



Incorrect gripping and turning positions very often lead to strain and wear injuries, even if the items lifted by the person are light. Avoid and prevent this by using the PRONOMIC lifting trolley - the mobile lifting trolley for the 21 st century, with an electrically adjustable height of the load platform. Matched to the needs of personnel in institutional kitchens, industrial plants, warehouses, chemist's shops and so on. Give free rein to your imagination and put the versatility of the PRONOMIC to full use. The lifting trolley can lift and transport cartons, boxes, cans, bags, canteens, plastic baskets and so on.



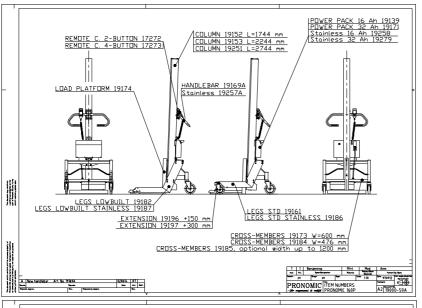

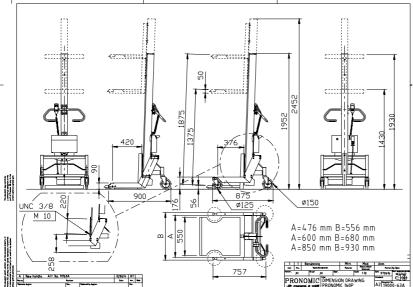

Technical specifications PRONOMIC 160P

Total height	1952, 2452 mm
Length(w. load platform)	875(1190)mm
Width	556, 680, 930mm
Load platform	550x550mm
Lifting height	1430, 1930mm
Lifting speed, no load	120mm/sek
Lifting speed, max load	70mm/sek
Front/rear wheel	125/150mm
Max load	175kg
Dead weight	70-90kg
Battery voltage (valve regulated lead batt.) 24V	
Battery charger included	

MODULE SYSTEM:

With our module system different models can easily be built using our standard modules, compact - wide - tall - low. The trolley is delivered assembled or in parts.

SIMPLE OPERATION

Due to large double wheels, one of them with a directional lock, and compact outside dimensions PRONOMIC is very easy to use in confined spaces and corridors. To enable the user to adopt an ergonomic working position, the height of the operating handle is adjustable. No risk of the trolley moving while lifting - an effective parking central brake will keep the trolley firmly in place. A remote control makes loading and unloading safe.

SIMPLE SERVICE

Due to exchangeable standard components the lift trolley provides best possible serviceability. The electronics and batteries are easily accessible. The freight costs are minimised while PRONOMIC is delivered in two parts, the chassis and the cloumn. It is easily assembled.


SIMPLEAND SAFE TECHNOLOGY

A number of options, load platforms with built in scales, adjustable forks, makes the trolley very flexible. The electrical liftable load platform is powered by environment friendly lead batteries that you recharge during night.

To avoid injuries the load platform automatically brakes at 3 kilos of pressure. The overload protection brakes at maximum load.

PRONOMIC can not rust - it is made of aluminium and stainless steel.

19000eng.pmd Rev 0401-1





www.pronomic-lift.be

